




Basic Portable System

Applications Notes

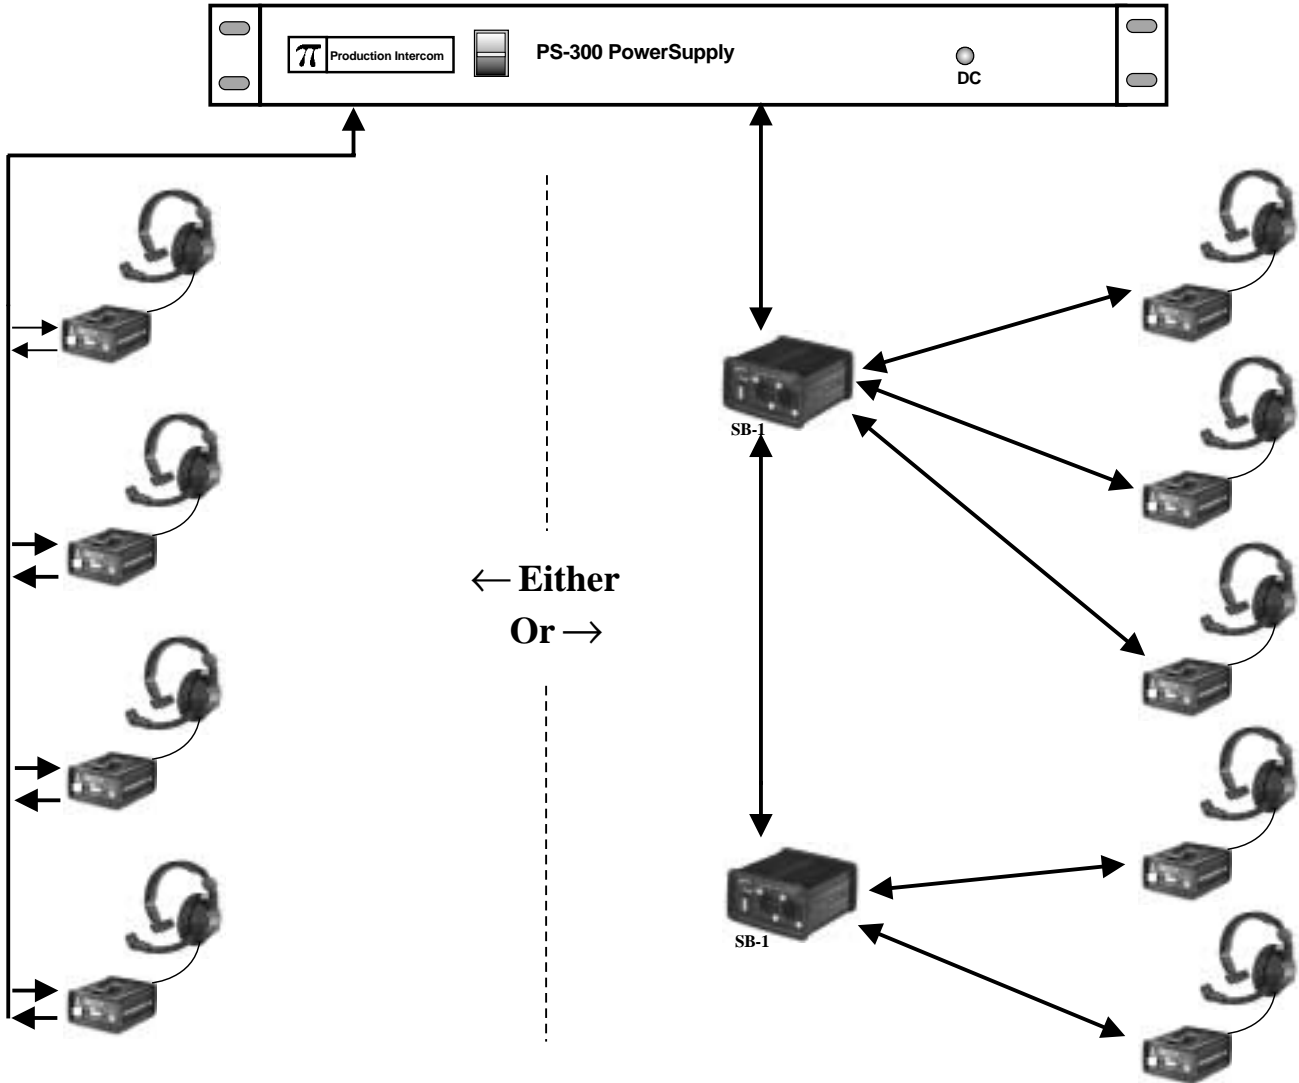

The PS-300 is a simplified low-cost version of the PS-301. It has the same critical components and supplies the same 2 amps of current. It lacks the front panel switching facilities of the PS-301 and has only one output XLR on the rear panel. It does have an LED indicator for DC, and the power switch lights to indicate that the unit is on. Belt packs can be connected as shown on the left, by daisy-chaining from one station to the next. Many users find the two cables connected to each station (when daisy-chaining) to be awkward. Using SB-1 Splitter-Isolators, as shown on the right, eliminates this inconvenience at moderate cost.